

# ARX 16-2C

## LIGHT TANDEM VIBRATORY ROLLER

EU STAGE V / U.S. EPA TIER 4 FINAL

### APPLICATIONS

- Small and medium construction sites
- Road maintenance
- City street repairs
- Confined work spaces
- Pathways
- Playgrounds, golf courses



### PRODUCTIVITY

#### Smooth rolling

No sudden starts and stops during machine operation.

#### Compaction performance

Varied machine sizes ensure proper fits for the application and jobsite.

### ERGONOMICS

The **operator platform** is designed for comfort, ensuring a pleasant experience no matter the duration of the shift.

The **operator station** offers 360° all-around machine visibility from the seat to maximize safety on the jobsite.

### SERVICEABILITY

#### Low downtime

Robust design that protects components.

#### Reduced maintenance

Easy-to-reach maintenance points.

### SUSTAINABILITY

#### ECODrop

Improved efficiency, reduced use of fluids.

#### Advanced technologies

Machine usage controlled to bring efficiency, productivity – and enable precise documentation.

### OPTIONAL EQUIPMENT

- Additional documentation printed
- Additional lights for hard canopy
- Additional Lights for ROPS
- Additional Lights for ROPS with Beacon
- Additional mirror
- AmmannCare Gold
- AmmannCare Silver
- Back-up alarm
- Back-up alarm adaptive
- CE conformity
- Certificate of origin
- Color scheme customer
- Drive lever additional left
- Edge cutter 45° (front left)
- Frame ROPS
- Hard canopy ROPS mounted
- Hard driving
- Hydraulic oil biodegradable
- Infrared thermometer
- Maintenance kit 1000h
- Maintenance kit 500h
- Maintenance kit 200h
- Maintenance kit 50h
- Overseas shipping preparation
- Registration plate holder
- Road lights
- Road lights incl. turn signals
- Scrapers combi tiltable
- Seat activation warning switch
- Seat belt 3"
- Seat options armrests
- Seat options seat heating
- Telematics ServiceLink Light
- Telematics ServiceLink Plus
- Toolset
- Warning beacon green LED
- Warning beacon LED for hard canopy
- Warning beacon LED for ROPS
- Warning beacon LED green for hard canopy
- Warning beacon permanently activated
- Warning beacon with holder
- Water tank lock


### STANDARD EQUIPMENT

- 1 amplitude / 2 frequencies
- Ammann color design and decals
- Articulation joint with oscillation
- AVC - Automatic Vibration Control
- Operator station with one drive lever (RH)
- One non-split drum / 4 tyres in rear
- Front and rear drive / front vibration
- Emulsion-spraying
- Open platform with safety handles
- Electronic drive lever
- Pressure water sprinkling with interval switch, 2 stage filtration
- Horizontally adjustable driver's seat
- Multi-functional display for machine overview
- Fixed scrapers
- Standard hydraulic oil
- Telematics ready
- On-board diagnostics
- Ammann Traction Control (ATC)
- Battery disconnection switch
- Central lifting point

**AMMANN**

# ARX 16-2C

StV/T4f

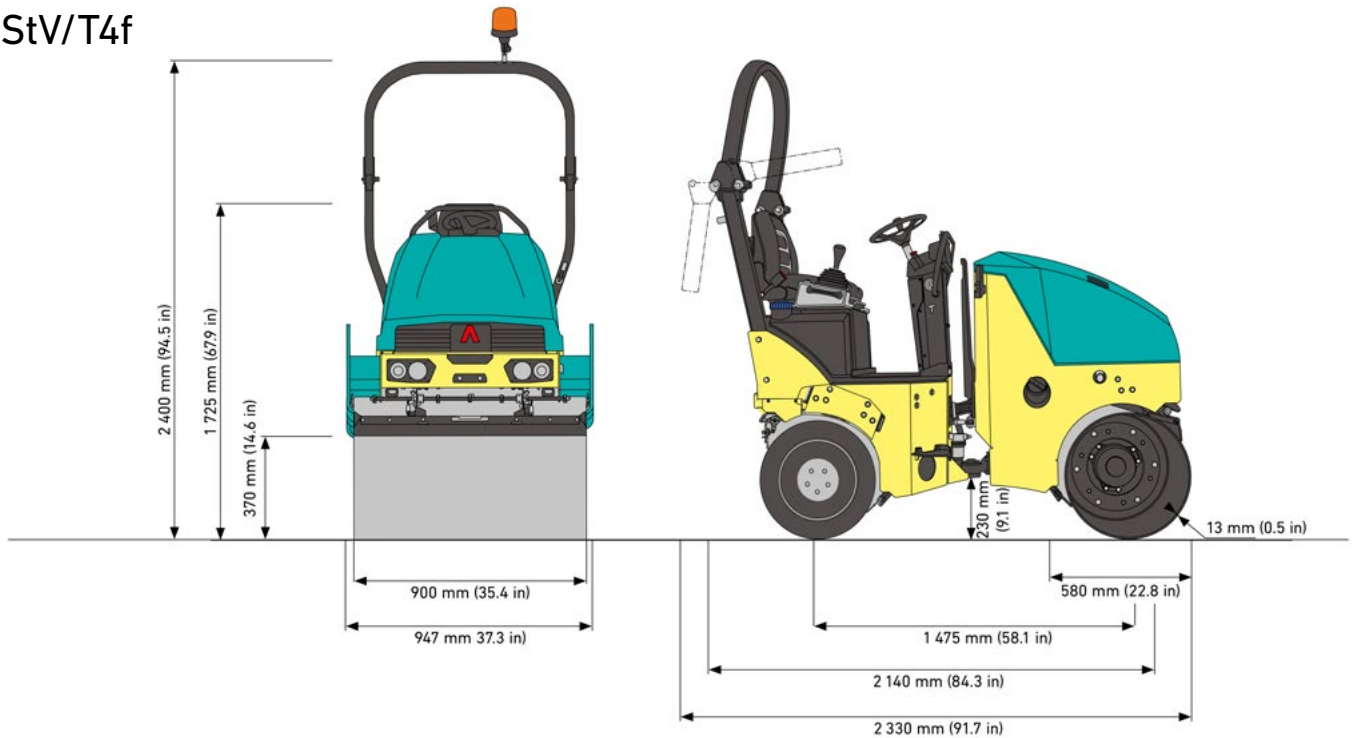

## WEIGHT & OPERATING CHARACTERISTICS

OPERATING WEIGHT CECE	1 450 kg (3,197 lb)
OPERATING WEIGHT MAX.	1 600 kg (3,527 lb)
STATIC LINEAR LOAD AVG.	8 kg/cm (44.8 lb/in)
MAX. WORKING SPEED	7.4 km/h (4.6 MPH)
GRADEABILITY WITHOUT VIBRATION	35%
GRADEABILITY WITH VIBRATION	30%
TURNING RADIUS (INNER)	2 130 mm (83.9 in)

## ENGINE

MANUFACTURER	Kubota
ENGINE TYPE	D1105
ENGINE SPEED	2400 / 2600 rpm
POWER OUTPUT ISO 14396	15.6 kW / 21.2 HP
EMISSION STAGE	EU Stage V / U.S. EPA Tier 4 Final

## COMPACTION FORCES

AMPLITUDE I	0.5 mm (0.020 in)
AMPLITUDE II	0.5 mm (0.020 in)
FREQUENCY I	60 Hz (3,600 vpm)
FREQUENCY II	70 Hz (4,200 vpm)
CENTRIFUGAL FORCE I	20 kN (4,496 lbf)
CENTRIFUGAL FORCE II	23 kN (5,171 lbf)

## MISCELLANEOUS

BRAKES OPERATING	Hydrostatic
BRAKES PARKING	Multiple-disc spring brake
BRAKES EMERGENCY	Multiple-disc spring brake
FUEL TANK CAPACITY	24 l (6.3 gal)
WATER TANK CAPACITY	110 l (29.1 gal)
ANTI-ADHESIVE TANK	10 l (2.6 gal)
TYPE OF WATERING	Pressure
HYDRAULIC TANK CAPACITY	28.5 l (7.5 gal)
STEERING ANGLE	±30°
OSCILLATION ANGLE	±6°
BATTERY VOLTAGE	12V
BATTERY CAPACITY	77 Ah
NUMBER OF WHEELS	4 pcs
SIZE OF TIRES	8/60-15
WHEEL LOAD	183 kg (403 lb)

## MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

ROCKFILL	N/A
SAND / GRAVEL	180 mm (7.1 in)
MIXED SOILS	120 mm (4.7 in)
SILT	N/A
CLAY	N/A
STABILISATION	80 mm (3.1 in)
ASPHALT	60 mm (2.4 in)